




Robust, engaging signage that works day and night to promote your organisation


TD-P3(E) series

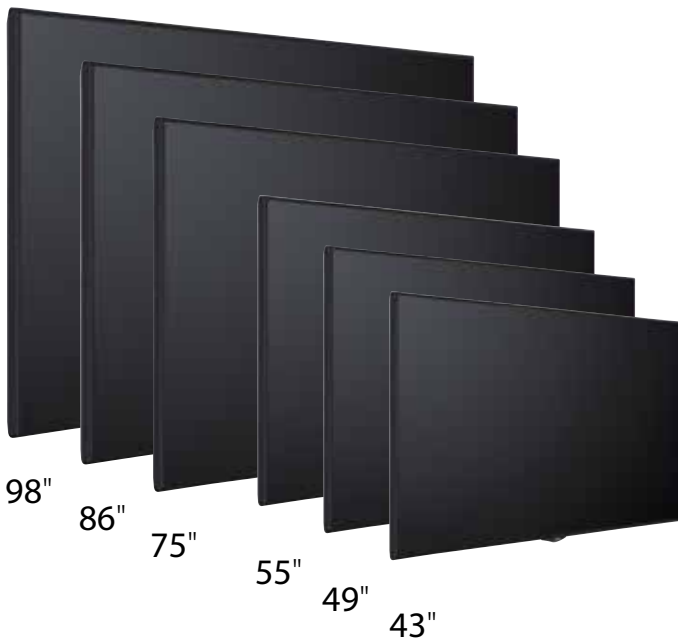

Toshiba's TD-P3(E) series offers clear, professional 24/7 playback of your content, without the need for an external media player. Thanks to our secure embedded USB, your audio/visual/images will convey your messages around the clock - with auto playback, multi-codec support and, for your peace of mind, failover playback in the absence of an input signal. Designed with the end user in mind, TD-P3(E) series is impressively customisable, with tiling and connectivity options for multiscreen displays.

Features

- 24/7 usage
- Full HD (43" 49" 55")
- 4K Ultra HD (75" 86" 98")
- Landscape/portrait orientation
- OPS slot
- Embedded USB player & scheduler
- Embedded signage with built-in memory option (TD-P3E model)
- Optional touchscreen available (43" 49" 55")



(TD-P3E)

TD-P3(E) series - 24/7 signage

		TD-P433(E)	TD-P493(E)	TD-P553(E)	TD-P753E	TD-P863E	TD-P983E
Screen	Diagonal Screen Size (cm/inch)	109cm/43"	124cm/49"	140cm/55"	191cm/75"	217cm/86"	249cm/98"
	Recommended Maximum Daily Usage (Hours)	24/7	24/7	24/7	24/7	24/7	24/7
	Portrait Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Visible Area (H x V)	941.184mm(H) x 529.416mm(V)	1073.78mm(H) x 604.0mm(V)	1209.6mm(H) x 680.4625mm(V)	1675.2mm(H) x 953.6mm (V)	1895.04mm (H) x 1065.96mm (V)	2158.848mm (H) x 1214.352mm (V)
	Panel Resolution	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160
	Panel Technology	IPS	IPS	IPS	IPS	IPS	SVA
	Viewing Angle (°)	178 L/R 178 U/D	178 L/R 178 U/D	178 L/R 178 U/D	178 L/R 178 U/D	178 L/R 178 U/D	178 L/R 178 U/D
	Brightness (cd/m ²)	400	400	400	600	500	500
	Native Contrast (number)	1000	1000	1000	1200	1200	4000
	Response Time (G to G) (ms)	12	12	6	8	8	6
Inputs	Full HD (1080p)	Yes	Yes	Yes	-	-	-
	UHD 4K (2160p)	-	-	-	Yes	Yes	Yes
	HDMI	1	1	1	1	1	1
	HDMI Support Type	1.4	1.4	1.4	2.0	2.0	2.0
	DisplayPort	1	1	1	1	1	1
	DisplayPort Support Type	1.0/1.2a	1.0/1.2a	1.0/1.2a	1.0/1.2a	1.0/1.2a	1.0/1.2a
	DVI	1	1	1	1	1	1
	Analogue D-SUB	1	1	1	1	1	1
	Component	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)
	Composite	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)	Yes (combined)
	USB	Yes	Yes	Yes	Yes	Yes	Yes
	USB Support Type	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music	Photo/Video/Music
	Lockable USB	Yes	Yes	Yes	Yes	Yes	Yes
RS232	Yes	Yes	Yes	Yes	Yes	Yes	
LAN (Control)	Yes	Yes	Yes	Yes	Yes	Yes	
Remote Extender	Yes	Yes	Yes	Yes	Yes	Yes	
RCA (L/R)	Yes	Yes	Yes	Yes	Yes	Yes	
Supported Input Resolutions	HDMI	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160
	DisplayPort	1920 x 1080	1920 x 1080	1920 x 1080	3840 x 2160	3840 x 2160	3840 x 2160
	VGA (D-Sub)	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Outputs	HDMI	Yes	Yes	Yes	Yes	Yes	Yes
	DisplayPort	1	1	1	1	1	1
	Speakers	8W + 8W	8W + 8W	8W + 8W	12W + 12W	12W + 12W	12W + 12W
	Digital Out	Coaxial	Coaxial	Coaxial	Coaxial	Coaxial	Coaxial
Tiling	Multi-screen (Zoom up)	Yes	Yes	Yes	Yes	Yes	Yes
	Daisy Chain DisplayPort	Yes	Yes	Yes	Yes	Yes	Yes
	Daisy Chain HDMI	Yes	Yes	Yes	Yes	Yes	Yes
	UHD Daisy chaining	Yes	Yes	Yes	Yes	Yes	Yes
	Tiling Matrix (xy)	Up to 10 x 10	Up to 10 x 10	Up to 10 x 10	Up to 10 x 10	Up to 10 x 10	Up to 10 x 10
	External Control RS232	Yes	Yes	Yes	Yes	Yes	Yes
	External Control LAN	Yes	Yes	Yes	Yes	Yes	Yes
Monitor ID Setting	Yes	Yes	Yes	Yes	Yes	Yes	
Other Features	OPS Slot	Yes	Yes	Yes	Yes	Yes	Yes
	Content Share	Yes	Yes	Yes	Yes	Yes	Yes
	Embedded USB Player	Yes	Yes	Yes	Yes	Yes	Yes
	RTC (Real Time Clock)	Yes	Yes	Yes	Yes	Yes	Yes
	Picture Shift	Yes	Yes	Yes	Yes	Yes	Yes
	Panel Lock	Yes	Yes	Yes	Yes	Yes	Yes
	HID Support	Yes	Yes	Yes	Yes	Yes	Yes
	WiFi	Yes	Yes	Yes	Yes	-	-
	Removable IR Sensor	Yes	Yes	Yes	Yes	Yes	Yes
	Removable Logo	Yes	Yes	Yes	Yes	Yes	Yes
	Cable Management	Yes	Yes	Yes	Yes	Yes	Yes
	Easy Alignment	Yes	Yes	Yes	Yes	Yes	Yes
	Open Browser	Yes	Yes	Yes	Yes	Yes	Yes
	Wireless Display	Yes	Yes	Yes	Yes	-	-
Embedded Signage	Yes (TD-P433E model only)	Yes (TD-P493E model only)	Yes (TD-P553E model only)	Yes	Yes	Yes	
Built-in Memory	Yes (TD-P433E model only)	Yes (TD-P493E model only)	Yes (TD-P553E model only)	Yes	Yes	Yes	
Power Supply	Input	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz	AC 100-240 V, 50/60 Hz
	Active Consumption	84W / 0.9A	105W / 1.05A	110W / 1.1A	265W / 2.5A	310W / 3.2A	TBC
	Standby Consumption	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
Dimensions	Mains Plug Type	2 pin/3 Pin IEC mains leads	2 pin/3 Pin IEC mains leads	2 pin/3 Pin IEC mains leads	2 pin/3 Pin IEC mains leads	2 pin/3 Pin IEC mains leads	2 pin/3 Pin IEC mains leads
	Width (mm)	965.5	1101.7	1238.2	1684	1975	2238.4
	Width Bezel (mm)	5.9 mm (L/R/T), 9.5mm (B)	6.8mm (L/R/T), 10.4mm (B)	7.0mm (L/R/T), 10.3mm (B)	16mm (L/R/T), 23mm (B)	38mm (L/R/T), 38mm (B)	39mm (L/R/T), 39mm (B)
	Height (mm)	557.3	634.6	711.8	967	1146	1294
	Depth (mm)	81.3	80.8	81.1	32	42	42
	Depth (mm) - including OPS slot	105.8	104.2	103.8	73	103	97.7
	Weight (kg)	10.5	13.5	17.5	38.5	66	TBC
	Packed Width (mm)	1077	1182	1361	1990	2163	242.3
	Packed Depth (mm)	129	132	139	265	318	38
	Packed Height (mm)	764	749	847	1227	1405	156.3
	Packed Weight (kg)	14.5	17.5	22	51	89	TBC
VESA - W x H (Screw type)	200 x 200 (M6)	200 x 200 (M6)	400 x 200 (M6)	600 x 400 (M8)	600 x 400 (M8)	900 x 600 (M8)	